




DOOR MOTION TECHNOLOGIES
DuraSwing™ ACCESSORIES

EFFECTIVE JULY 31, 1998




DM-P1- Wireless wallmount switch. 9VDC battery powered. Stainless steel faceplate. 250 codes. DM-R1 receiver needed.



DM-P2- Direct-wire, version of DM-P1. Stainless faceplate with debossed symbol and legend.



DM-P3- Frame mount switch Normally open, direct-wire. Satin finish stainless steel faceplate.



DM-P4- Handheld wireless transmitter. 250 codes. Must be used with DM-R1 receiver standard in most DuraSwing door operators.



DM-P5- Keychain transmitter. Miniature version of DM-P4. 250 codes. DM-R1 receiver needed.




DM-P6- 4" Round wallmount switch. Direct-wire, stainless with debossed legend. Flush mt.




DM-P42- 2 channel version of DM-P4. Will trigger two separate devices, each having a DM-R1.




DM-P4- 4 channel version of DM-P4. Will trigger four separate devices, each having a DM-R1.




DM-KP- Wireless keypad 250 codes. DM-R1 receiver needed. 9VDC, wall mount.



DM-WT- Wheelchair joystick transmitter. 250 codes. Two channel version option. DM-R1 receiver needed.




DM-ECU- Wireless transmitter module for ECU and other special triggers. DM-R1 receiver needed. 250 codes.




DM-LS7002- Electric lockstrike. For wood / aluminum jamb prep. For cylindrical lockset bolt with 5/8" bolt throw. 24VDC.


ACCESSORIES




DM-A2- Straight actuator arm. Required for use in in-swing door applications. Standard colors as DM-A1

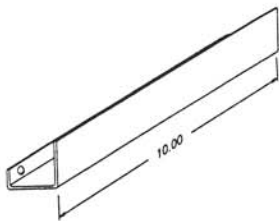


DM-B1- Inswing bracket. Required for inswing door installations and where a "captured" arm is desired.





DM-R1- Radio frequency receiver. For use with DM-P1, P4, or P5 transmitters. Receiver is standard in most DuraSwing series operators.

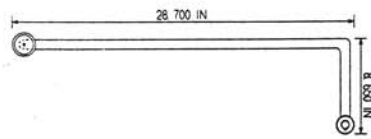


DM-A3- Extended actuator arm. Required for use where additional reach is required around the door to get to full open position. Standard colors as DM-A1.




DM-B2- Stabilizer bracket. Provides additional mounting surface area. Ideal for "inverted" operator installations.

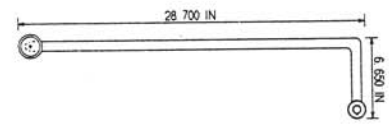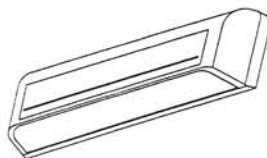

DM-A1- Standard actuator arm. Standard colors are Dark Bronze and Silver.

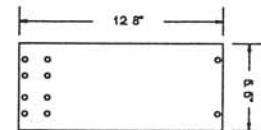

DM-B3- Drop bracket. Specifically designed for "Herculite"™ frameless, all-glass, center-pivot doors.

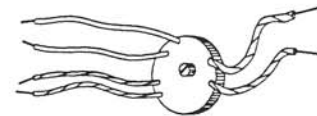

DM-VSM- Vestibule synchro module. Will delay "second" door operator. Adjustable 1 to 12 seconds.

Note: Some of the above accessories have multiple uses, too numerous to describe here. If you have a peculiar application, feel free to call customer service with your questions.

DOOR MOTION TECHNOLOGIES, INC. KALAMAZOO, MI

PH: 800-291-1561 FAX: 616-327-6158